


Viento

Wall Mounted Series



MyECO
R32

Inverter WiFi 

SyioKing[™]
Malaysia











Viento Inverter Series


Model:
A3WMY10EF - A3WMY25EF

Cooling Capacity:
9,000 - 24,000 BTU/h

Power Input:
0.89 - 2.16 kW

Horse Power (HP)	1.0	1.5	2.0	2.5
VIENTO Series	Indoor Unit			
	A3WMY10EF	A3WMY15EF	A3WMY20EF1	A3WMY25EF
				
	Outdoor Unit			
	A3LCY10E	A3LCY15E	A3LCY20E1	A3LCY25E
				

Temperature Fluctuation During Cooling Operation

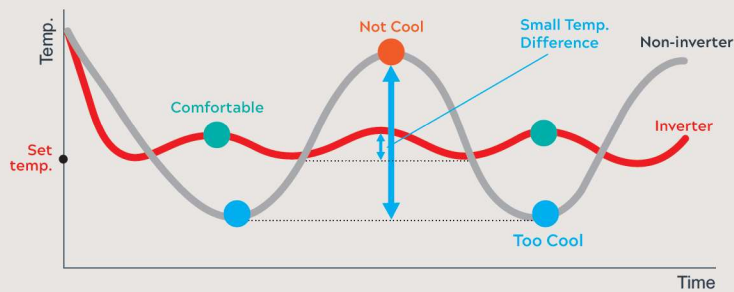

Inverter technology empowers Acson inverter air conditioners to precisely control compressor speed by electronically adjusting voltage, current, and frequency based on sensor feedback. This ensures optimal management of compressor revolution speed, resulting in minimal temperature fluctuations during the cooling process.



Energy Efficiency

Unlike non-inverter units that operate on an ON/OFF cycle, inverter units can run at lower capacities once the set temperature is reached, effectively reducing power consumption. This variable operation results in lower electricity usage and significant energy savings over time.




Comfortable


Acson inverter system flexibly adjusts capacity to match cooling needs, maintaining a steady temperature by minimizing deviations from the set point. This ensures optimal comfort levels, ideal for uninterrupted sleep.

Intelligent Savings **Save Mode**

Save Mode is an intelligent feature designed to optimize energy consumption while meeting essential human comfort needs. Activating Save Mode reduces maximum operating current and power consumption by 30% through compressor frequency limitation.

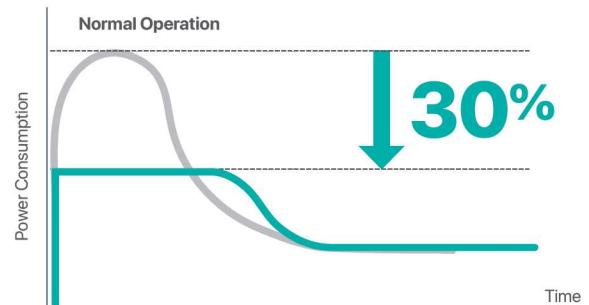

*Maximum capacity decreases during Save Mode, requiring more time to reach the set temperature.

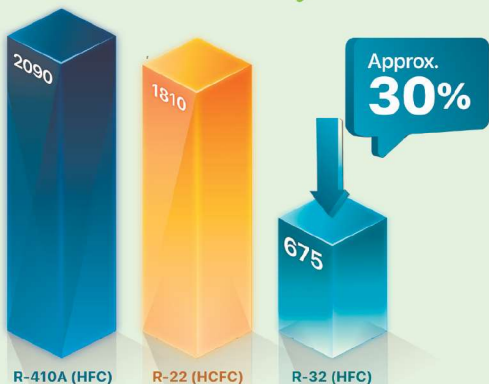

R32 Refrigerant **Greenery Refrigerant**

Acson MyEco features the eco-friendly R32 refrigerant, known for its minimal environmental impact. With zero Ozone Depletion Potential and up to 30% lower Global Warming Potential compared to R410A and R22, it significantly contributes to combating climate change.



Better Environmental Properties



Better Performance




Economic Efficiency

The R32 refrigerant has lower Global Warming Potential (GWP), which is one third lower than R410A.




Filtronz+ Filter

Filtronz+ Filter effectively decompose virus and reduce bacteria & fungus on the air filter surface.




Decomposition of Viruses

The effectiveness rate of virus decomposition is increased by 99% in 2 hours

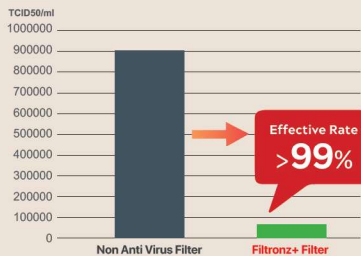

Reduction of Bacteria

The effectiveness rate of bacteria reduction is more than 99.99% in 24 hours




Reduction of Fungus

Generation of fungus achieved Grade 0 in 24 hours (No fungus visible under the microscope)




*Image is for illustration purposes


How Filtronz+ Filter works?



Silver ions (Ag+) on the filter absorb virus to the filter surface



Combination of organic and inorganic components simultaneously react to change the protein that exists on the virus surface



Enzyme protein inactivated, thus the viruses are decomposed and prevented from spread

Test Measuring Method:

Textiles- Determination of antiviral activity of textile products (ISO 18184-2014)

Test Number: 2020FM24347R01, 2020FM2604R01


Test Measuring Method:

Test for antimicrobial activity of plastic (JIS Z 2801 : 2010)

Test Number: 2021FM05003R01E

Tested Specimen	Virus		Bacteria		Fungus
	Influenza H1N1	Chicken Coronavirus Infectious bronchitis Virus	Esherichia Coli	Staphylococcus	Aspergillus Niger, Penicillium Pinophilum, Trichoderma viride, Chaetomium Globosum, Paecilomyces Variotii
Test Organization	Guangdong Detection Center of Microbiology				
Test Report Number	No.2020FM24347R01	No.2020FM26047R01	No.2021FM05003R01E		No.2021FM05004R01E
Test Result	99.94% in 2 hours	99.99% in 2 hours	>5.9 (99.99987%)	>4.6 (99.99749%)	Grade 0 (no fungus visible under microscope)

Indoor Coil Maintenance with iClean+ & iClean

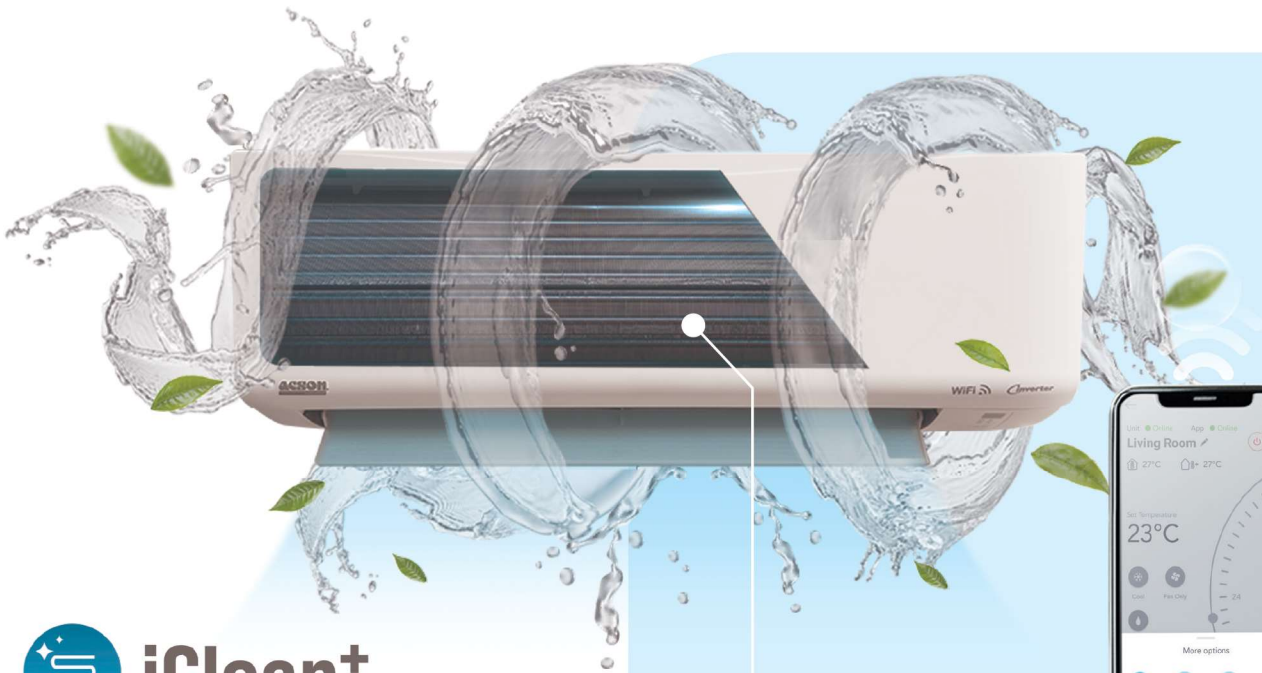

iClean+

i-Clean+ is an exclusive Acson technology where the indoor cooling coil of the air conditioner is cleaned using dew condensation to partially remove attached dust or mold.




iClean

iClean is a new feature which will automatically dried the indoor cooling coil to prevent mold & bacteria growth.




***Activated via MY Acson
Mobile Apps only.**

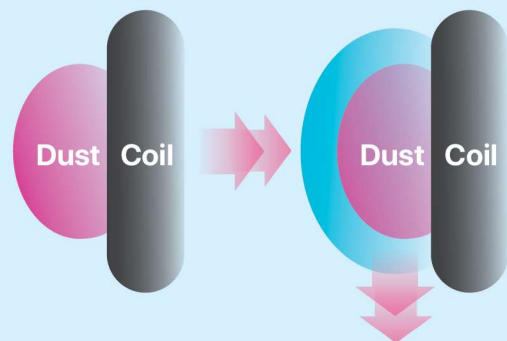

By utilizing this iClean+ & iClean features, it able to improve indoor environment quality and maintain the performance of air conditioner. ***Activated via MY Acson Mobile Apps only.**

MY Acson, MY Control

Viento series is equipped with the Acson Wi-Fi Adapter, which connects to your Wi-Fi router and enables you to control air conditioner settings from your mobile device.



Acson Wifi Adapter, AWM01A01

MY Acson App

A single swipe on the phone application which designed with simple control user interface. MY Acson is currently available for both Android & IOS system.



MY Complete Control

- Setting different modes (e.g: cool, dry, fan, turbo, sleep, quiet mode)
- Controlling fan speed, air flow direction & temperature settings
- Controlling the Zoning System



MY Convenience

- Set 7-day schedules & timers that adjust AC according to your lifestyle
- Control every AC unit from your couch - no need to go racing room-to-room changing settings
- Guest sharing option - possible to be both hospitable and safe



MY Comfort

- Pre-cool your room whilst still in the workplace or office.
- Room is already pre-cooled according to your desired settings as you reach home.




MY Energy-Efficient

- Monitor and track energy consumption for better budget planning

*subject to applicable model


ULTRA Printed Circuit Board (PCB)

Acson's Ultra PCB is specially strengthened to withstand voltage fluctuations, allowing it to operate across a wide range of voltages, even in areas with an unstable power supply. With the new Ultra PCB, our Viento series air conditioner units can seamlessly operate from 150V to 264V and withstand voltage fluctuations from 0V to 440V.

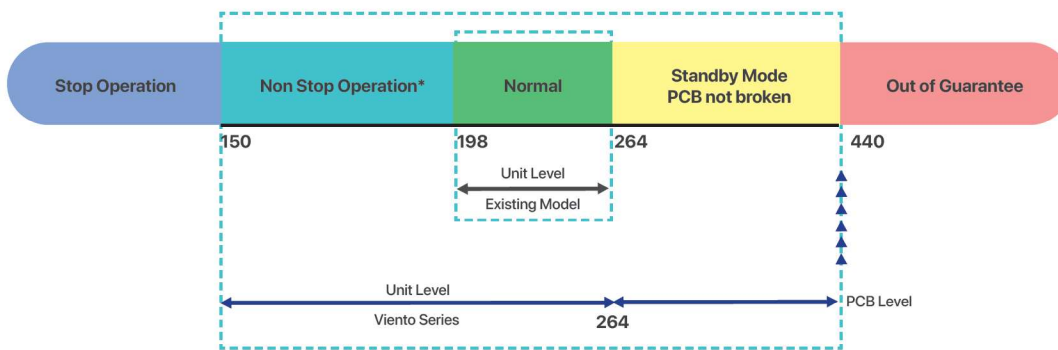

Anti Corrossion Blue Fin



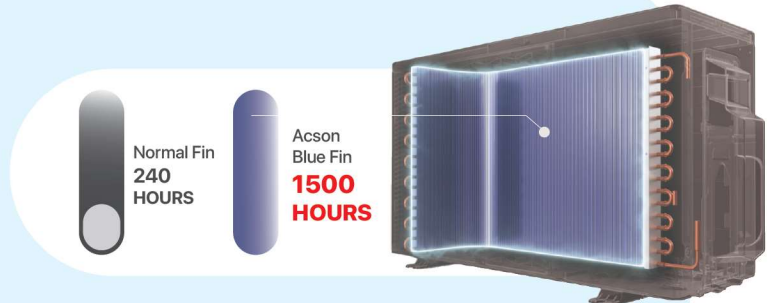

This anti-corrosion blue fin acts as a protective coating on the fins, extending the unit's lifespan. The condenser coil resists corrosion, rust, and rain, maintaining optimal cooling performance. Proven to meet the JIS Z 2371 Standard Salt Spray test, it ensures reliable operation in harsh conditions.



SPECIFICATION

Viento

Wall Mounted Series

Model	Indoor Unit		A3WMY10EF	A3WMY15EF	A3WMY20EF1	A3WMY25EF	
	Outdoor Unit		A3LCY10E	A3LCY15E	A3LCY20E1	A3LCY25E	
Nominal Cooling Capacity	BTU/h		9,000 (3,500-9,200)	12,300 (4,100-12,800)	18,000 (5,600-18,500)	24,000 (6,600-24,500)	
	kW		2.64 (1.03 - 2.70)	3.60 (1.20 - 3.75)	5.28 (1.64 - 5.42)	7.03 (1.93 - 7.18)	
Nominal Total Input Power	W		890	1,245	1,650	2,160	
Nominal Running Current	A		4.00	5.52	7.29	9.49	
EER	W/W		2.96	2.90	3.2	3.25	
CSPF	Wh/Wh		4.2	4.2	4.57	4.2	
Power Supply	V/Ph/Hz		220 - 240/1/50				
MEPS RATING							
Indoor Unit	Control	WiFi Control	Built In				
		Operation	LCD Remote Control/WiFi Control				
		Air Discharge	Automatic Louver (Up & Down)				
	Air Flow	Turbo	I/s(CFM)	165 (350)	170 (360)	212 (450)	340 (720)
		High	I/s(CFM)	160 (340)	165 (350)	203 (430)	302 (640)
		Medium	I/s(CFM)	123 (260)	132 (280)	179 (380)	264 (560)
		Low	I/s(CFM)	97 (205)	104 (220)	137 (290)	227 (480)
		Quiet	I/s(CFM)	71 (150)	78 (165)	123 (260)	170 (360)
	Sound Pressure Level (H/M/L/Q)	dBA		39/33/26/21	40/35/28/23	42/39/32/29	43/41/36/30
	Unit Dimension	Height	mm(in)	280 (11.02)	280 (11.02)	288 (11.32)	297 (11.68)
		Width	mm(in)	730 (28.74)	730 (28.74)	770 (30.27)	990 (38.92)
		Depth	mm(in)	213 (8.39)	213 (8.39)	234 (9.20)	273 (10.73)
	Packaging Dimension	Height	mm(in)	293 (11.54)	293 (11.54)	314 (12.36)	371 (14.61)
		Width	mm(in)	796 (31.34)	796 (31.34)	830 (32.68)	1073 (42.24)
		Depth	mm(in)	360 (14.17)	360 (14.17)	357 (14.06)	375 (14.76)
	Unit Weight	kg(lb)		8 (17.64)	8.5 (18.74)	9.5 (20.94)	13.0 (28.66)
	Condensation Drain Size	mm(in)		19.05			
Outdoor Unit	Air Flow	I/s(CFM)	380 (805)	519 (1100)	769 (1630)	656 (1390)	
	Sound Pressure Level (H/M/L/Q)	dBA	48	48	52	52	
	Unit Dimension	Height	mm(in)	460 (18.11)	550 (21.65)	615 (24.21)	615 (24.21)
		Width	mm(in)	650 (25.59)	675 (26.57)	845 (33.27)	845 (33.27)
		Depth	mm(in)	240 (9.45)	284 (11.18)	300 (11.81)	300 (11.81)
	Packaging Dimension	Height	mm(in)	515 (20.28)	610 (24.02)	668 (26.30)	668 (26.30)
		Width	mm(in)	790 (31.10)	801 (31.54)	967 (38.07)	967 (38.07)
		Depth	mm(in)	345 (13.58)	384 (15.11)	378 (14.88)	378 (14.88)
	Unit Weight	kg(lb)		17 (37.48)	22 (48.50)	35 (77.16)	37 (81.57)
	Fin Spec	Anti Corrosion Blue Fin					
	Pipe Connection	Liquid	mm(in)	6.4 (1/4)			
Gas		mm(in)	9.5 (3/8)	9.5 (3/8)	12.7 (1/2)	12.7 (1/2)	
Maximum Piping Length	m		20	20	30	30	
Maximum Piping Height	m		15	15	20	20	
Refrigerant Type	R32						

CSPF = Cooling Seasonal Performance Factor
MEPS = Minimum Energy Performance Standard

- All specifications are subject to change by the manufacturer without prior notice.
- Nominal Cooling Capacity is based in the conditions: Cooling 27°C DB / 19°C WB indoor and 35°C DB / 24°C WB outdoor.
- Sound Pressure Level is according to JIS C 9612 standard. Position of the measurement point is 1m in front and 0.8m below the unit.
- Units are tested & compiled to international standards such as ISO 5151.



*1st year free labour and compressor.

*2nd - 5th year free compressor only.

*Applicable during promotion period 1st April 2025 to 31st March 2026.

ACSON
International
Air Conditioners

ACSON MALAYSIA SALES & SERVICE SDN.BHD.
a member of **DAIKIN** group

Business Registration NO.198401017130 (129688-D)

No. 7A, Jalan 13/4, Seksyen 13, 46200 Petaling Jaya,
Selangor Darul Ehsan, MALAYSIA.

Tel : +603 7964 8200 Sales Fax : +603 7956 9909

Service Fax : +603 7956 9907 Acson Careline : 1300 22 3344

Penang	: +604-5377 176	Pahang	: +609-5178 696
Perak	: +605-3129 828	Kelantan	: +609-7405 233
Melaka	: +606-2926 196	Sarawak	: +6082-344 128
Johor	: +607-3551 599	Sabah	: +6088-420 205

Authorized Dealer :

Products manufactured in an ISO certified facility.
This document contains the most current product information as of this printing.
For the most up-to-date product information, please logon to www.acson.com.my

CAT-A3WMY-EF-2502

www.acson.com.my |     AcsonMalaysia

